

Functional

Pressure switch for applications involving excess pressure.

GW 500 A4

The pressure switch acts via a rubber diaphragm against the force of the setting spring on the micro-switch.

Pressure switch GW...A4

The switching mechanism reacts to overpressure and closes, opens or switches over a current circuit when the specified pressure setpoint is overshoot or undershot.


Switching function

As pressure rises:

1 NC opens, 2 NO closes.


As pressure falls:

1 NC closes, 2 NO opens.



Definition of switching difference Δp

The switching difference Δp is the pressure difference between the upper and lower switching pressures.

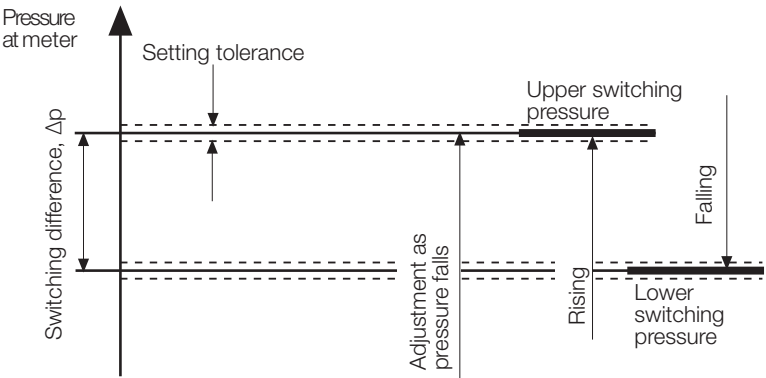

GW...A4, Design: Clear cover

Degree of protection IP 54

- IP 54**
- 5** Protection against ingress of solid particles $\varnothing \geq 1$ mm
Protection against access to hazardous parts with a wire, $\varnothing \geq 1$ mm
Complete contact protection
 - 4** Protection against a water jet.
No hazardous conditions may result.

LGW...A4/2, Design: Metal housing


Protection class: IP 65

- IP 65**
- 6** Protection against the entry of dust (dust sealed).
Protection against access to hazardous parts using $\varnothing \geq 1$ mm wire
Complete contact protection
 - 5** Protection against a water jet from a nozzle directed at the unit (housing) from any directions
No hazardous conditions may result (water jet).

Specifications

Max. Betriebsdruck	GW 500 A4	600 mbar (60 kPa)		
Pressure connection	p+: centrally on underside of housing, G 1/4 internal thread to ISO 228: Gas or air Special version: additional G 1/4 internal thread at side			
Temperature range	Ambient temperature	-15 °C to +70 °C		
	Medium temperature	-15 °C to +70 °C		
	Storage temperature	-30 °C to +80 °C		
Materials	GW...A4			
	Housing lower section	aluminium die casting		
	Switch	Polycarbonat		
	Switching contact	Standard: Silber (Ag) Optional: gold-plated (Au) silver, suitable for DDC applications: DC 24 V; 0.02 A		
	Diaphragm	NBR		
	Hood	polycarbonate		
	GW...A4			
	Housing lower section	aluminium die casting		
	Switch	Polycarbonat		
	Switching contact	Standard: Silber (Ag) Optional: gold-plated (Au) silver, suitable for DDC applications: DC 24 V; 0.02 A		
	Diaphragm	NBR		
	Hood	Extrusion cast zinc, powder-coated		
Switching voltage	Ag contact	AC eff.	min. 24 V	max. 250 V
		DC	min. 24 V	max. 48 V
	Au contact	DC	min. 5 V	max. 24 V
Nominal current	Ag contact	AC eff.	10 A	
	Au contact	DC	20 mA	
Switching current	Ag contact	AC eff.	min. 20 mA	max. 6 A with cos φ 1
		AC eff.		max. 3 A with cos φ 0,6
		DC	min. 20 mA	max. 1 A
	Au contact	DC	min. 5 mA	max. 20 mA
Electrical connection	Plug connection for line sockets as per DIN EN 175 301-803, 3-pin with protection contact			
Degree of protection	GW...A4	IP 54 to IEC 529 (EN 60529), (clear hood)		
	GW...A4/2	IP 65 as per IEC 529 (EN 60529), (metal housing)		
Adjustment	With rising pressure and installed in a vertical position. Optional rising or dropping pressure adjustment on-site possible. Note switch point change if installation position changes.			
Setting tolerance	±15 % switch point deviation based on the setpoint and with unit installed in a vertical position			


Dimensions [mm]
GW 500 A4

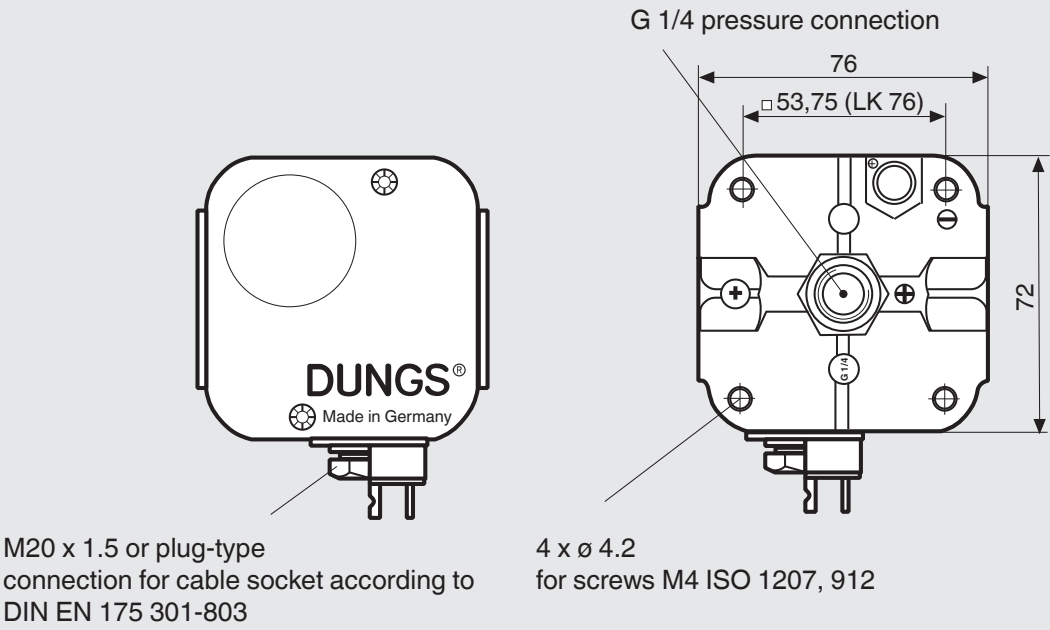

Installation position

	Standard installation position; if a different installation position is used, pay attention to the changed operating points: GW 500 A4 ca. ± 5 mbar
	When installed horizontally, the pressure switch switches at a pressure higher
	When installed horizontally overhead, the pressure switch switches at a pressure lower
	When installed at an intermediate position, the pressure switch responds if there is maximum upper or lower pressure deviation w.r.t. the set pressure reference value.

Designation

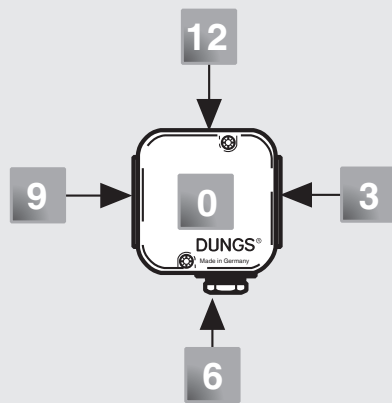

Ordering example

Pressure switch design

Pressure switch GW A4

Adjustment range

100 - 500 mbar

Contact material

Ag

Electrical connection

Equipment plug

G 1/4 pressure connection

V0; at position 0

GW 500 A4 [Ag-G3-V0]

GW 500 A4

Ag-M-MS9-V0-VS3

Pressure connection

V0 Pressure connection G 1/4 position 0
V3 Pressure connection G 1/4 position 3

Verschlußschraube

VS0 Verschlußschraube an Position 0
VS3 Verschlußschraube an Position 3

Pressure connection

V0 Pressure connection G 1/4 position 0

Meßstutzen nur GW 500 A4 (600 mbar)

MS3 Meßstutzen an Position 3
MS9 Meßstutzen an Position 9
M9 Meßstutzen, offen, Position 9

Electrical connection

M Cable gland M20 x 1,5
G3 Equipment plug

Contact material

Ag silver
Au silver, gold-plated

Adjustment ranges [mbar]

GW 500 A4 100-500

Pressure switch type

GW...A4 Clear cover, PC, (IP 54)
Pressure switch switches when the pressure exceeds or drops below the adjusted setpoint.
GW...A4/2 Metal housing, powder-coated (IP 65)
Differential pressure switch switches when the pressure exceeds or drops below the adjusted setpoint.

Accessories for pressure switches

GW...A4

Order No.

Kit: G3 equipment plug, 3-pin + E for GW...A4

219 659

Line sockets, 3-pin + E

210 318

grey GDMW for GW...A4, GW...A4/2

Fluorescent lamp assembly kit 230 V yellow

231 773

Fluorescent lamp assembly kit 120 V yellow

231 772

Display LED assembly kit 24 V yellow

231 774

Fluorescent lamp assembly kit 230 V green

248 239

Display LED assembly kit 24 V green

248 240

Test nipple G 1/4 with ring seal (5 x)

230 398

Screw plug G 1/4 with ring seal (5 x)

230 396

Double pressure switch assembly kit (not for /2-version)

213 910

Mounting bracket, metal

230 288

**Pressure switch for gas, air, flue
gases and combustion products**

**GW 500 A4
GW 500 A4/2**



Technical overview 1 mbar = 100 Pa = 0,1 kPa ≈ 10 mm WS 1 Pa = 0,01 mbar ≈ 0,1 mm WS

Type	Version	Order No.	Order No.	Setting range		Degree of protection [mbar]	Degree of protection
	[Ag-G3-MS9-V0]	1 piece	48 pieces	[mbar]	max.	p ↑ min. p ↑ max.	
GW 500 A4 Pressure switch	GW 500 A4	218 270	-	100 - 500	± 15 %	≤ 10 ≤ 15	IP 54
Type	Version	Order No.	Order No.	Setting range		Degree of protection [mbar]	Degree of protection
	[Ag-G3-MS9-V0-VS3]	1 piece	48 pieces	[mbar]	max.	p ↑ min. p ↑ max.	
GW 500 A4/2 Pressure switch including line socket	GW 500 A4	238 572	-	100 - 500	± 15 %	≤ 10 ≤ 15	IP 65

We reserve the right to make any changes in the interest of technical progress.

Head Offices and Factory
Karl Dungs GmbH & Co. KG
Karl-Dungs-Platz 1
D-73660 Urbach, Germany
Telefon +49 7181-804-0
Telefax +49 7181-804-166

Postal address
Karl Dungs GmbH & Co. KG
Postfach 12 29
D-73602 Schorndorf, Germany
e-mail info@dungs.com
Internet www.dungs.com