

Data Sheet

Electronic Ignition Units EBI4 Series

Application




The EBI4 series is electronic ignition units for intermittent ignition between 2 electrodes or 1 electrode and frame in small and medium size oil or gas burners.

Low weight and small dimensions, due to high frequency operation, makes the EBI4 series very suitable for use in modern compact burners.

Connections with a plug on the primary side and bushes on the secondary side make installation and service quick and simple.


Applications and Features

- 1- or 2-pole ignition
- Low power consumption due to high efficiency (new technology)
- Complies with the RoHs and WEEE directives
- EMC according to EN 55014-1 and EN 55014-2
- Earth connection through the primary cable
- Same dimensions and flexible mounting as the well-known EBI series

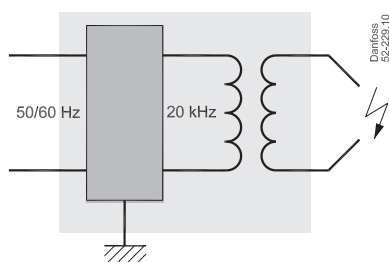


EBI4

- Oil/gas burners
- 2-pole ignition
- 33% ED at 60 °C
- Top or front connection for secondary cables
- 230 V

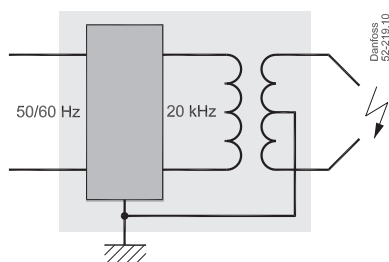

EBI4 M

- Oil/gas burners
- 2-pole ignition
- Secondary mid-point connected to earth/frame
- 33% ED at 60 °C
- Top or front connection for secondary cables
- 230 V

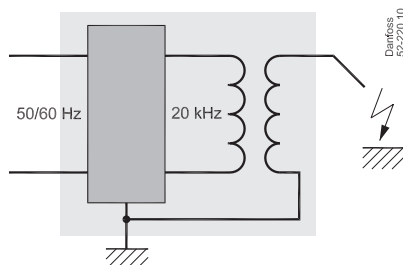

EBI4 1P

- Gas burners
- 1-pole ignition between 1 electrode and frame
- 33% ED at 60 °C
- Top or front connection for secondary cables
- 230 V

Technical data

Type	EBI4	EBI4 M	EBI4 1P
Mains connection	230 V - 0.25 A - 50/60 Hz - 60 VA		
Working range	187 - 255 V		
Main fuse	max. 10 A		
Secondary connection*	15 kV amp.	2 × 7.5 kV amp.	12 kV amp.
Short circuit current	40 mA (rms)	40 mA (rms)	40 mA (rms)
Frequency	20 kHz	20 kHz	20 kHz
ED in 3 minutes (cutting in)	33% at 60 °C		
Ambient temperature	-10°C to +60 °C		
Storage temperature	-25°C to +85 °C		
Enclosure	IP 40 (Not for secondary connections)		
EMC (Generic Standard)	Emission EN 55014-1, Immunity EN 55014-2		
Primary connection	<ul style="list-style-type: none"> • 3 × 0.5 mm² cable with special plug • 3 × 0.75 mm² cable with standard AMP connection 		
Secondary connections	2 × Ø4 mm plugs		1 × Ø4 mm plugs
Earth connection	Through the primary cable		
Distance between electrodes	Recommended 2.5 mm to 5.0 mm		
Weight	235 g		

* Avoid use of divergent electrodes due to risk of electrical cable break down and too high ignition voltage.

Dimensions and connections

EBI4	EBI4 M	EBI4 1P	a: Left terminal b: Right terminal c: Earth connection
a+b+c	a+b+c	b+c	

