
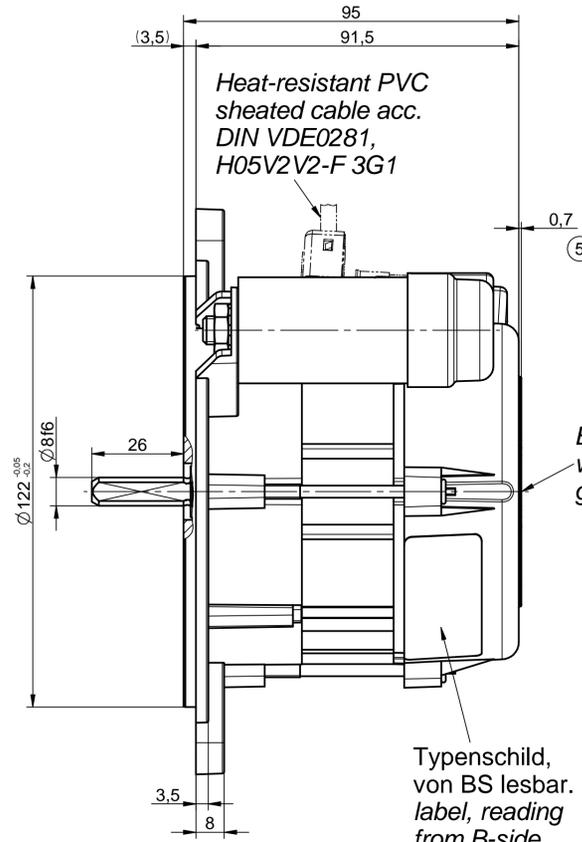



BK	black	schwarz
BN	brown	braun
RD	red	rot
OG	orange	orange
YE	yellow	gelb
GN	green	grün
BU	blue	blau
WH	white	weiß
GY	grey	grau

wire (ETFE), rating 150°C, 600V


WIGAFLEX GL-DD, warm class F, DIN 40620
Permanence of heat-resistance: -38°C to +155°C

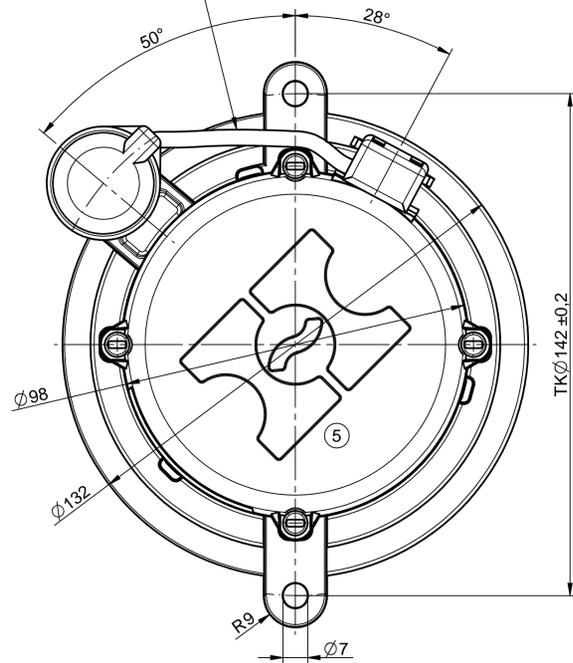

Typenschild, von BS lesbar.
label, reading from B-side


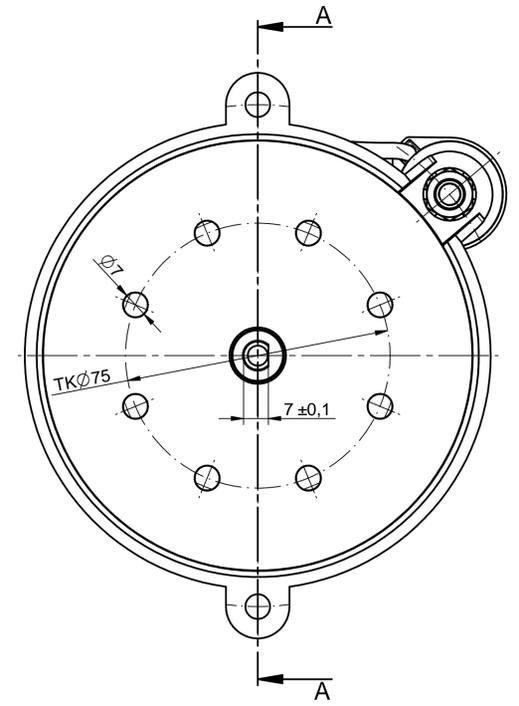


Rechtslauf
rotation direction: clockwise

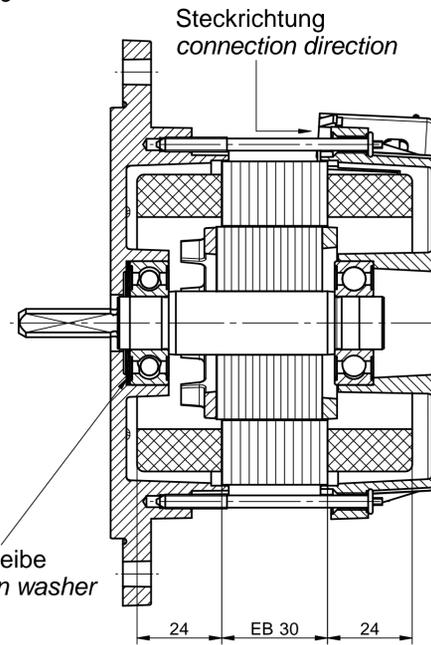


Schnitt A-A
Section A-A

schwarz lackiert
black varnished

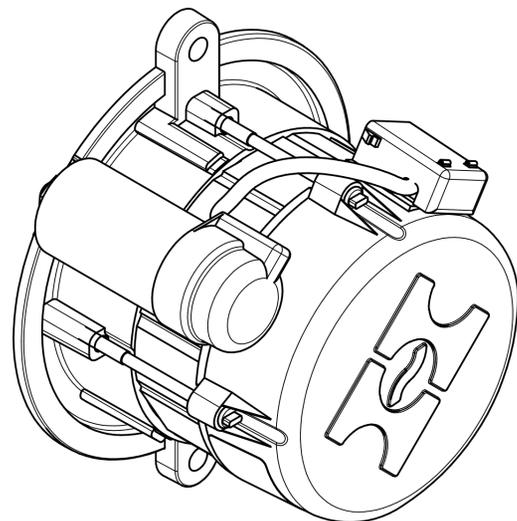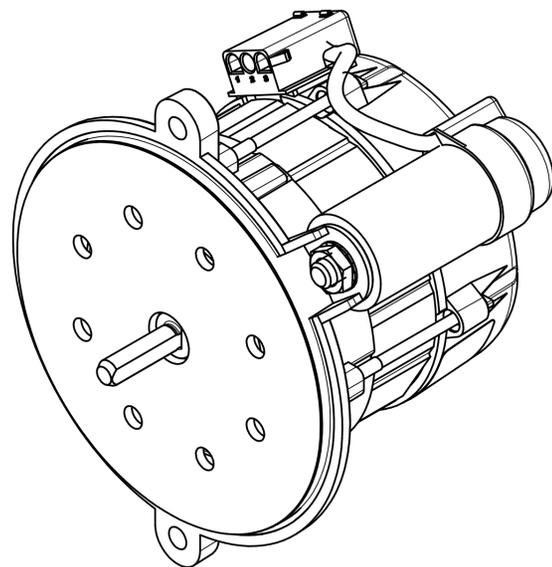

In Steckrichtung gesehen
seen in Connection direction



HANNING ELEKTRO-WERKE	CE
Typ: OE6y2B5-415	Nr.:
220-240 1~	50/60Hz
2740/3280/min	0,8A
C: 4µF 380V	IP40
Made in Germany	EN60034

HANNING ELEKTRO-WERKE		Mod.-Nr.	141000415	05
Dok.-Nr.		141000415		
Art.-Nr.		141000415		
Dok.-Art. Maßblatt		Ersetzt		Blatt 1/1

Alle Maßangaben in mm, Datumsformat: [tt.mm.jjjj]